




This is the NON-Contact Moisture Meter, it is an electronic dampness indicator with a measuring process working on the principle of high frequency. The instrument is used for non-destructively tracing of dampness in building materials of all kinds as well as for detecting damp distribution in walls, ceilings and floors. It is particularly suitable for pre-testing the readiness of building materials for covering prior to CM measurement.



DT-128M

PINLESS MOISTURE METER

- | Quickly indicates the moisture content of materials
- | CM % measured function
- | Depth of penetration about 20-40mm
- | Measure and HOLD Function
- | MAX/MIN display Function
- | Alarm Function
- | Low battery indication
- | Auto Power Off
- | White Backlit LCD Display

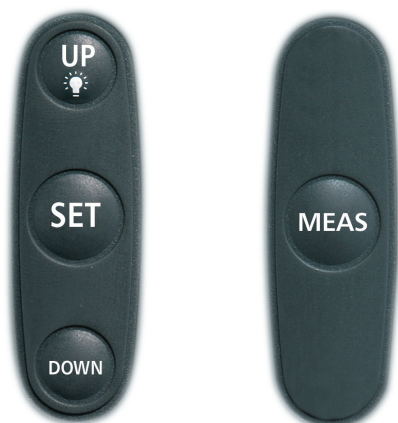

Button on both sides of the rugged housing, easy to use

General Specifications

Measuring Range	0.0-100.0
Penetration Depth	20-40mm
Resolution	0.1
Battery	Three "AAA" Batteries

Moisture Table of Comparison

Construction Material	Display (Unit)	Moisture Status
Gypsum	<30	DRY
	30-60	RISK
	>60	WET
Cement	<25	DRY
	25-50	RISK
	>50	WET
Wood	<50	DRY
	50-80	RISK
	>80	WET

Accessories

Battery, Carrying Case, Instruction Manual, Test Certificate